

Date of Deposit March 9, 2000

424/Rec'd PCT/PTO 0-9 MAR 2000



FORM PTO-1390
(REV. 5-93)

U.S. DEPARTMENT OF COMMERCE
PATENT AND TRADEMARK OFFICE

CASE NO. 9883/66

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

U.S. APPLICATION NO. 09/508473

INTERNATIONAL APPLICATION NO.
PCT/JP99/04637

INTERNATIONAL FILING DATE
August 27, 1999

PRIORITY DATE CLAIMED
August 27, 1998

TITLE OF INVENTION
BILLING METHOD FOR COMMUNICATION NETWORK

APPLICANT(S) FOR DO/EO/US
Masaaki Yamamoto et al.

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a FIRST submission of items concerning a filing under 35 U.S.C. 371
2. ☐ This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371
3. ☐ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☐ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2)).
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)).
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)) and/or amendments under Article 34.

Items 11 to 16. Below concern other document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☐ A FIRST preliminary amendment.
☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information: Power of Attorney and Copy of Assignment

9/PRB

09/508473
430 Rec'd PCT/PTO 09 MAR 2000

- 1 -

DESCRIPTION**BILLING METHOD FOR
COMMUNICATION NETWORK**

5

Technical Field

The present invention relates to a billing method for a communication network
10 wherein a plurality of user terminals are provided information from a server device.

Background Art

Pull-type information transmission wherein a user accesses a server device of
15 an information provider from a communication terminal such as a personal computer or
the like to download desired information has been known conventionally in the field of
information providing services which use the Internet.

Additionally, push-type information transmission wherein information is
provided to the user from the server side without awaiting access by a user has been
20 proposed in recent years.

Communication networks have become more complicated and diversified of
late, so that the forms of networks in which various routers exist between the server
device and the user terminal such as by interposing a gateway device between networks
with different protocols have also increased.

25

Disclosure of the Invention

09/508473 130900

As the forms of networks diversify as described above, the types of services for information transmission are becoming various, and billing by communication fees or information fees is desired as appropriate to each type of service.

The present invention has been made in consideration of this type of situation,
5 and has the purpose of offering a billing method for an information communication network capable of performing billing suited to the information transmission service type.

In order to resolve the above problem, a first aspect of the present invention is a billing method in a communication network including an information provider server
10 device, a plurality of user terminals which receive information from the server device and a transfer device for routing information transmission between the server device and the user terminals; wherein the transfer device comprises:

a step of recording billing management information for identifying server
15 devices which are to be subject to IP billing (IP billing means that charges for the information providing services are made not to users but to IP (Information Provider).);

a step of detecting a network address of the server device designated when the user terminal receives an information transmission from the server device;

a step of determining whether or not the server device is to be subject to IP
20 billing based on the detected network address and said billing management information; and

a step of performing a billing procedure with respect to the information provider which performed the information transmission if the server device is determined to be subject to IP billing.

25 Additionally, in the above-described first aspect of the present invention, the

transfer device may be such as to not route an information transmission if it is determined not to be subject to IP billing.

Additionally, a second aspect of the present invention is a billing method in a communication network including an information provider server device, a plurality of user terminals which receive information from the server device and a transfer device for routing information transmission between the server device and the user terminals; wherein the server device comprises:

a step of including billing information which indicates whether or not to use IP billing which is billing with respect to the information provider in the transmission data supplied to the user terminals in response to a request; and

the transfer device comprises:

a step of determining whether or not the information transmission is subject to IP billing based on the billing information when routing the exchange of the transmission data; and

a step of performing a billing procedure with respect to the information provider which provided the information transmission if it is determined to be subject to IP billing.

Additionally, in either the above-mentioned first or second aspect of the present invention, the transfer device may be such as to perform a billing procedure with respect to users who have received the information transmission if it is determined not to be subject to IP billing.

Additionally, a third aspect of the present invention is a billing method in an information communication network including an information provider server device, a plurality of user terminals which receive information from the server device and a

transfer device for routing information transmission between the server device and the user terminals;wherein the transfer device comprises:

a mailbox for mediating push-type information transmission that is subject to IP billing which is billing with respect to the information provider;

5 and comprises:

a step of storing in the mailbox information mail sent from the server device designating a desired destination and the address of the mailbox;

a step of transmitting the information mail stored in the mailbox to user terminals which are the designated destinations; and

10 a step of performing a billing procedure with respect to the information provider which offered the information transmission with respect to push-type transmission services through the mailbox.

Additionally, a fourth aspect of the present invention is a billing method in a communication network including an information provider server device, a plurality of

15 user terminals which receive information from the server device and a transfer device for routing information transmission between the server device and the user terminals;

wherein said transfer device comprises

an IP-billed mailbox for mediating push-type information transmission that is subject to IP billing which is billing with respect to the information provider; and

20 a user-billed mailbox for mediating information transmission that is not subject to IP billing;

and performs a billing procedure with respect to the information provider which offered the information transmission with respect to push-type information transmission services through the IP-billed mailbox; and

00508473-0304000

a step of performing a billing procedure with respect to the user that received the information transmission with respect to information transmission services through the user-billed mailbox.

Additionally, in the present invention, the object of the billing may be a
5 communication fee with respect to communication services for the information
transmission or may be an information fee with respect to information provided by the
information transmission.

10 Additionally, the transfer device may be such as to perform a billing procedure of information fees with respect to users if it is determined as not being subject to IP-billing, and otherwise not perform a billing procedure of information fees.

Additionally, in the present invention, the server device may belong to a first communication network following a first communication protocol and the plurality of user terminals belong to a second communication network following a second communication protocol different from that of the first communication network; and the transfer device may be a gateway for converting between the first and second communication protocols and routing information transmissions.

Additionally, in the present invention, the second communication network may be a local network accommodating specific user terminals; and the first communication network may be a global network interconnecting information resources such as the server device assigned identification information for identifying an absolute network address.

Additionally, in the present invention, the second communication network may be a mobile communication network accommodating a plurality of user terminals which are mobile terminals, and the first communication network may be the Internet.

Best Modes for Carrying Out the Invention

Herebelow, an embodiment of the present invention shall be explained with reference to the drawings. This embodiment is structured as a system wherein the present invention is applied to a mobile packet communication network. The present invention is not restricted to the following embodiment, and various modifications are possible within the range of the technical concept thereof.

10 A: Structure of Embodiment

(1) Overall Structure of System

Fig. 1 is a block diagram showing an embodiment of the present invention.

In the drawing, MS denotes a mobile station which receives packet communication services from a mobile packet communication network MPN. This mobile station MS is connected not only to the mobile packet communication network MPN shown in the drawing, but also to a mobile telephone network which is not shown, and is therefore capable of receiving mobile telephone services as well. The mobile station MS comprises an voice input-output portion for a user to perform voice communications, a radio portion for performing radio communications with a base station BS, an information display portion comprising a liquid crystal panel or the like and an operating portion where information input operations such as number input and character input are performed, and also has an internal microcomputer for controlling these parts. Additionally, the mobile station MS has software (i.e. a browser) for browsing HTML (Hyper Text Markup Language) document data (hereinafter referred to as HTML data), and displays an interactive screen for the user based on HTML data

supplied from an information provider (hereinafter abbreviated to IP) via a mobile packet communication network.

Additionally, the mobile packet communication network MPN comprises a base station BS, a packet processing module PS, a gateway server GWS, a subscriber database UDB, a billing system BILL and a communication line for connecting these elements.

The base stations BS are positioned at predetermined intervals obtained by dividing the ground into ranges of e.g. a radius of 500 m, and perform radio communications with mobile stations MS visiting the radio zones formed thereby.

The packet processing module PS is a computer system provided in a packet switching center accommodating a plurality of base stations BS, which receives packet switching requests from the mobile stations MS (packet switching service registration to be explained below), and performs the switching of packets in the mobile packet communication network.

The gateway server GWS is a computer system provided in a mobile packet gateway switching center for interconnecting the mobile packet communication network MPN with other networks such as the Internet INET, which converts communication protocols which differ between the networks. Specifically, conversions are made between the transmission protocol for mobile packet communications networks used by the mobile packet communication network MPN and the TCP/IP used in other networks such as the Internet INET. Additionally, the gateway server GWS works in cooperation with the IP server W, the subscriber database UDB and the billing system BILL to perform control relating to the various applications, such as information providing services and billing procedures for information transmission.

The subscriber database UDB stores a subscriber registration information file composed of information relating to subscribers of the mobile packet communication network MPN and an IP registration information file composed of registration information of the IP (Information Provider). Fig. 2 is a data format diagram showing

an example of the content of this subscriber database UDB. As shown in the drawing, the subscriber registration information file contains attribute data indicating the attributes of each subscriber such as the telephone number of the mobile station MS, name, sex, birthdate and address for each subscriber (i.e. the user of the mobile station MS) in the mobile packet communication network MPN. Additionally, the IP registration information file contains the company name and the absolute address on the network (e.g. in the case of the Internet, the URL (Uniform Resource Locator) which specifies the information resources on the WWW (World Wide Web); herebelow, the absolute network address in the present embodiment shall be referred to as the URL), information indicating whether the type of billing is IP billing or not, and information indicating whether the type of billing depends on the amount or is fixed-rate, for each IP which is contracted to receive gateway services with the company which runs this mobile packet communication network MPN. Here, IP billing refers to billing for information transmissions service which is performed not with respect to the user who received the transmission service, but with respect to the information provider. On the other hand, billing with respect to the user shall hereinafter be referred to as user billing.

The billing system BILL calculates the fees for the providing of services based on service history information supplied from the gateway server, and issues a bill to the user or the IP. While billing types include user billing and IP billing as well as amount-dependent and fixed-rate, the billing system BILL performs billing in

accordance with each billing type.

The IP server W is a server system run by the IP, which sends information to be provided to the users over a network in an HTML data format. The IP server W can be connected to the gateway server GWS via an exclusive line or the Internet INET, can be provided inside the gateway server GWS which is provided by the owner of the mobile packet communication network MPN (hereafter referred to as an IP server W-MAX).

(2) Structure of Gateway Server

Next, the structure of the gateway server GWS shall be explained. Fig. 3 is a block diagram showing the structure of a gateway server GWS. In the drawing, the gateway server GWS comprises a system control portion I-MAX, a user information managing portion U-MAX, a billing managing portion P-MAX, an electronic mail managing portion M-MAX, an IP server W-MAX and a bus BUS for connecting these parts.

The system control portion I-MAX controls the various portions of the gateway server GWS, and functions as an interface between networks such as by performing protocol conversion between the mobile packet communication network MPN and other networks such as the Internet INET.

The user information managing portion U-MAX stores and manages subscriber registration information and IP registration information obtained by referencing the subscriber database UDB, as well as the correspondence between telephone numbers of the mobile stations and user management numbers (to be explained below) and the access histories of users to the IP server W (for example, the number of accesses to each IP server). Additionally, the user information managing portion U-MAX performs conversions between the telephone numbers and user management number, collation of

telephone numbers and comparison of attribute data based on the above stored information.

The billing managing portion P-MAX records and manages information necessary for billing with respect to the information transmission services, and supplies

- 5 this information to the billing system BILL. Specifically, it stores the fact that an electronic mail has been received from the IP server W as history information, calculates the number of packets to be exchanged when transmitting the electronic mail to the user, and stores this calculated value. Additionally, the billing managing portion P-Max references the content of the subscriber database UDB transferred to the user
- 10 information managing portion U-MAX, in order to determine whether or not the billing type for each IP is IP billing, and whether or not it is amount-dependent, then requests billing to the billing system BILL based on the billing type.

The electronic mail managing portion M-MAX mediates the exchange of electronic mail between mobile station MS users, between mobile station MS users and

15 users of other networks such as the Internet INET, or between the mobile station MS users and the IP server W. This electronic mail managing portion M-MAX is provided with mailboxes for storing the electronic mails to be transferred for each user or for each IP server W. There are three types of mailboxes in accordance with the type of mail service, and these being distinguished by the addresses of their mailboxes (mail

20 addresses).

- (i) A first mailbox BOX1 is a conventional mailbox wherein the electronic mail transferred between users is stored at mail addresses assigned for each user.
- (ii) Next, a second mailbox BOX2 is a mailbox for storing electronic mail transmitted from the IP to specific users for the purposes of providing information or the like.

03500473-030900

Here, a specific user is a user who has already completed registration procedures with respect to the IP. This second mailbox BOX2 is used in a first type of service due to push-type information transmission to be described below.

- (iii) Next, a third mailbox BOX3, as with the second mailbox BOX2, is a mailbox for
- 5 storing electronic mail transmitted from the IP to a user for the purposes of providing information. It differs from the second mailbox BOX2 in that instead of storing electronic mail provided to users which have been pre-registered in the IP, it stores electronic mail provided to users having attributes (attributes such as sex, age, address, etc.) designated by the IP. This third mailbox BOX3 is used in a second type of
- 10 service due to push-type information transmission to be described below.

The IP server W-MAX is a server system provided by the company owning the mobile packet communication network MPN. This IP server W-MAX, like the other IP server W, performs services such as providing information to the users.

15 B. Operations of the Embodiment

Next, operations of the embodiment having the above-described structure shall be explained.

First, information transmission shall be explained, followed by an explanation of the billing procedures.

20 B-1. Information Transmission

With regard to the information transmission according to the present embodiment, there is pull-type information transmission in which the user of a mobile station MS receives information transmissions by accessing the IP server W, and push-type information transmission in which information transmission is performed from the

IP server W side to specified or non-specified users without waiting for user access.

Herebelow, the explanation shall be given separately for these types.

(1) Pull-type Information Transmission

Fig. 4 is a sequence showing a basic operation for pull-type information

5 transmission.

As shown in the drawing, the mobile station MS performs a packet switching service registration in cooperation with the packet processing module PS (step S1).

The packet switching service registration is a preliminary registration procedure for enabling packet switching in a mobile packet communication network MPS. When

10 this packet switching service registration is completed, the mobile station MS sends a line connection request signal to the mobile packet communication network MPS (step S2). This line connection request signal is sent through the packet processing module PS to the gateway server GWS (step S3). If a line connection is possible, then the gateway server GWS sends a line connection response signal through the packet
15 processing module PS back to the mobile station MS (steps S4, S5). As a result, packet switching becomes possible between the mobile station MS and the gateway server GWS.

Next, the mobile station MS sends a connection request signal designating the URL of a desired IP server W (step S6). This connection request signal is routed
20 through the packet processing module PS and sent to the gateway server GWS (step S7). The gateway server GWS receives the connection request signal, and establishes a link with the IP server W of the designated URL (step S8).

When a link has been established with the gateway server GWS in this way, the IP server W sends HTML data which has been prepared beforehand to the mobile

station MS (step S9). This HTML data is routed through the gateway server GWS and transferred to the packet processing module PS (step S10). Furthermore, at the packet processing module PS, the received HTML data is transferred to the mobile station MS (step S11).

5 The operations of the above steps S6-S11 are repeatedly performed in accordance with the amount of all of the data to be transmitted from the IP server W to the mobile station MS. At this time, the mobile station MS interprets sequentially transmitted HTML data by means of the browser and displays the received information at the information display portion.

10 When the data transmission to the mobile station MS has been completed, the mobile station MS sends an acknowledgement signal (step S12). The packet processing module PS transfers this acknowledgement signal to the gateway server GWS so as to make a delivery notification (step S13). When the IP server W completes the data transmission to the mobile station MS, the link between the gateway
15 server GWS and the IP server W is released (step S14).

 Additionally, when there is a data delivery notification from the mobile station MS to the gateway server GWS, the gateway server GWS performs a billing procedure with respect to the information transmission. The billing procedure performed at this time shall be described in detail below.

20 (2) Push-type Information Transmission

 First, the basic operations of the push-type information transmission shall be explained, followed by explanations of two types of services due to push-type information transmission.

(i) Basic Operations of Push-type Information Transmission

Fig. 5 is a sequence diagram illustrating the basic operations of push-type information transmission.

In the drawing, an IP server W first sends information to be provided to users to the gateway server GWS in the form of electronic mail (step S21). When the

- 5 gateway server GWS receives the electronic mail, it stores this in the designated mailbox and sends a communication start notification signal to the packet processing module PS (step S22). This communication start notification signal includes information designating the destination address of the electronic mail. When the packet processing module PS receives this communication start notification signal, it
- 10 calls the mobile station MS corresponding to the destination address included in the signal (step S23).

When the user of the mobile station MS performs a specified operation on the mobile station MS in response to the call, the same sequence as the above-described steps S1-S5 (shown in Fig.4) is performed, and it enters a state of being capable of

- 15 packet switching with the gateway server GWS (steps S24-S28). Next, the gateway server GWS sends a reception notification signal including the address information of the mailbox in which the electronic mail is stored to the packet processing module PS (step S29). Furthermore, the packet processing module PS sends the received reception notification signal to the mobile station MS (step S30).

- 20 Upon receiving the above-described reception notification signal, the mobile station MS sends a connection request signal designating the address of the mailbox included in the reception notification signal to the packet processing module PS (step S31). This connection request signal is transferred through the packet processing module PS to the gateway server GWS (step S32). Upon receiving the connection

request signal, the gateway server GWS sends a connection acknowledgement signal to the packet processing module PS (step S33). The packet processing module PS sends the received connection acknowledgement signal to the mobile station MS (step S34).

Next, the gateway server GWS reads the electronic mail received from the IP
5 server W from the mailbox whose address is designated in the connection request signal, and transfers the electronic mail to the packet processing module PS (step S35). Upon receiving the electronic mail, the packet processing module PS sends this mail to the mobile station MS which issued the connection request (step S36).

The operations of the above steps S31-S36 are repeatedly performed in
10 accordance with the amount of data in the electronic mail to be transmitted from the IP server W to the mobile station MS.

When the mobile station MS has received the electronic mail in this way, a delivery notification is sent to the gateway server GWS in the same manner as in steps S12 and S13 shown in Fig.4 (steps S37, S38), and the push-type information
15 transmission is completed.

Additionally, if there is a data delivery notification from the mobile station MS to the gateway server GWS, then the gateway server GWS performs a billing procedure with respect to the information transmission. The billing procedure performed at this time shall be described in detail below.

20 (ii) First Type of Service by means of Push-type Information Transmission

In the present embodiment, there are two types of services by means of push-type information transmission. A first type shall now be described.

The first type is a service of transmitting electronic mail from the IP server for the purpose of providing certain information to users who have completed a registration

procedure with the IP beforehand, wherein the electronic mail is stored in the second mailbox BOX2, and the electronic mail is transmitted in response to a user request after the user has been called.

Fig. 6 is a conceptual diagram for explaining the first type. In this drawing, a

- 5 user who desires services such as information provision of a specific IP operates a mobile station MS to access the network, and performs preliminary registration procedures with respect to the IP server (step S61). With this access, the subscriber number of the user (i.e. the telephone number of the mobile station MS) is transferred to the gateway server GWS. The gateway server GWS converts the received subscriber
- 10 number into a user management number which is user identity information having a one-to-one correspondence with the telephone number in the user information managing portion U-MAX in order to avoid the telephone number being sent outside the packet communication network MPN. This user management number is sent from the gateway server GWS to the IP server W, and is stored in the IP server W as user
- 15 registration information (step S62).

- Then, if the IP server W has information to be provided to a registered user, the IP server W arranges the information as transmission data in the form of electronic mail, appends to the electronic mail the address of the second mailbox BOX2 and the user management number of the registered user to which the information is to be provided,
- 20 and sends the mail to the gateway server GWS (step S63).

When the gateway server GWS receives the electronic mail from the IP server W, it stores the mail in the second mailbox BOX2 of the electronic mail managing portion M-MAX, and converts the designated user management number to the corresponding telephone number in the user information managing portion U-MAX,

and calls the mobile station MS of that telephone number (step S64).

If the user of the mobile station MS who has received this call desires to receive the information provided by the IP server, the user operates the mobile station MS to access the gateway server GWS and requests a download of the electronic mail (step S65). The download request signal sent to the gateway server GWS at this time contains the telephone number of the mobile station MS which is the source of the request. The gateway server GWS compares the telephone number of the mobile station MS from which the request signal is originated and the telephone number corresponding to the user management number designated by the IP server W at the time of reception of the electronic mail in the user information managing portion U-MAX, thereby judging whether or not to permit access to the second mailbox BOX2, and thereafter reads the electronic mail from the mailbox BOX2 and sends it to the mobile station MS (steps S66, S67).

In this way, it is possible to provide information to specific users registered with the IP server W.

(iii) Second Type of Service by means of Push-type Information Transmission

Next, the second type shall be explained. The second type is a service whereby electronic mail sent from the IP server for the purposes of providing information to users having attributes (attributes such as sex, age and address) designated by the IP server is stored in a third mailbox BOX3, and the electronic mail is transmitted to relevant users in response to user requests after they have been called.

Fig. 7 is a conceptual diagram for explaining a second type. In the drawing, users who are prepared to receive services such as information provision from an unspecified IP operate the mobile station MS to access the network, and perform

preliminary registration procedures with respect to the gateway server GWS (step S71).

With this access, the telephone number of the mobile station MS is transferred to the gateway server GWS, and this is stored in the user information managing portion U-MAX of the gateway server GWS as user registration information.

- 5 Then, if the IP server W has information to be provided to users, the IP server W arranges the information in electronic mail form, appends attribute data such as sex, age and address for specifying the user to the electronic mail, and sends the mail to the gateway server GWS (step S72).

- When the gateway server GWS receives the electronic mail containing the
10 attribute data from the IP server W, it stores the electronic mail in the third mailbox BOX3, and in the user information managing portion U-MAX, compares the attribute data appended to the electronic mail with the attribute data of each user registered in the subscriber database UDB in order to specify relevant users. For example, if the attributes designated by the IP server W are "men in the thirties who live in Tokyo",
15 then a search is made for relevant users having these attributes from among the users registered in the subscriber database UDB, and the telephone number of those users are extracted. The gateway server GWS calls the mobile stations MS of the telephone numbers extracted in this way (step S73).

- If the user of a mobile station MS called in this way wishes to receive the
20 information provided by the IP server, the user operates the mobile station MS to access the gateway server GWS, and requests a download of electronic mail (step S74). At this time, the telephone number of the mobile station MS which is the source of the request is appended to the download request signal sent to the gateway server GWS. The gateway server GWS, in the user information managing portion U-MAX, compares

the telephone number of the mobile station MS from which the request signal is originated with the telephone numbers of users who have completed the above-described registration procedure in order to judge whether or not to permit access to the third mailbox BOX3, after which it reads the electronic mail from the third mailbox

- 5 BOX3 and sends it to the mobile station MS which made the request (steps S75, S76).

In this way, it is possible for the IP server W to perform an information providing service to users who desire the provision of information from among users who are prepared to receive information from the unspecified IP server W.

B-2: Billing Procedure

- 10 While types of billing include communication fee billing for communication services and information fee billing for information providing services of IP's, communication fee billing shall be explained as an example in the present embodiment.

Additionally, the billing procedures for the present invention include user billing with respect to users who have been provided information and IP (Information
15 Provider) billing for billing the IP's who have provided the information. In the present embodiment, whether to perform user billing or IP billing is managed by different methods for the case of pull-type information transmission and push-type information transmission. Both cases shall be explained below.

(1) In the Case of Pull-type Information Transmission

- 20 Generally, in the case of pull-type information transmission, the information is provided in accordance with a request from the user, so that user billing is more readily applicable. However, there are cases in which the IP wishes to provide information free in response to requests from unspecified users for the purposes of advertisement or the like, and in this case, IP billing is more readily applicable. Therefore, in the

present embodiment, in the case of pull-type information transmission, user billing is applied in principle and in exceptional cases where IP billing is to be applied, the IP which is subject thereto is pre-registered in the subscriber database UDB. Then, the gateway server GWS extracts from the subscriber database UDB a list of URL's of IP servers W to which IP billing is to be applied, and stores it in a memory in the billing managing portion P-MAX as an IP-billing list table.

Fig. 8 is a flow chart showing the billing procedure for pull-type information transmission. In this drawing, the user first operates the mobile station MS to access a designated IP server W, and upon receiving a delivery acknowledgement signal from the user, the gateway server GWS checks whether or not the URL of the IP server W accessed by the user corresponds to an IP to be IP billed as listed in the above-described table (step S101).

Here, if it is not an IP sever to be IP-billed, then user billing is applied as usual. In this case, the billing managing portion P-MAX of the gateway GWS sends a user management number of the user who received the information transmission and the sum of received packet numbers to the billing system BILL (step S102). The billing system BILL calculates a communication fee by multiplying the sum of packets supplied from the gateway server GWS with a unit price, and issues a bill to the user specified by the user management number (step S103).

On the other hand, if the URL of the IP server W accessed by the user corresponds to an IP to be IP-billed, then IP billing is applied. In this case, the billing managing portion P-MAX of the gateway server GWS sends the sum of the received packets and the URL of the IP server W which was accessed to the billing system BILL (step S104). The billing system BILL calculates the communication fee by

multiplying the sum of packets supplied from the gateway server GWS with a unit price, and issues a bill to the IP (step S105).

(2) In the Case of Push-type Information Transmission

Next, the billing procedure for the case of push-type information transmission shall be described. Fig. 9 is a flow chart showing a billing procedure for the case of push-type information transmission. In the drawing, when the gateway server GWS receives electronic mail from the IP server W in the second mailbox BOX2 or the third mailbox BOX3, it recognizes that there has been an order for push-type information transmission, and decides to apply IP billing (step S201). That is, in the case of push-type information transmission, IP billing is more readily applicable to this type of information transmission, so that in the present embodiment, IP billing is always applied.

Next, the gateway server GWS specifies the user to which information is to be provided as described above, then calls the mobile station MS to transmit the electronic mail received from the IP server to the mobile station MS, but in the case of IP billing, user billing is not performed with respect to this transmission, and the IP is billed for everything.

In this case, the billing managing portion P-MAX of the gateway server GWS references the IP registration information stored in the subscriber database UDB, and checks whether the type of billing to be applied to the IP server W is amount-dependent or fixed-rate (step S202).

If the billing type is amount-dependent, the billing managing portion P-MAX of the gateway server GWS sends the sum of the packets exchanged in the transmission of electronic mail and the URL of the IP server W which was the source of the

electronic mail to the billing system BILL (step S203). The billing system BILL multiplies the sum of the packets supplied from the gateway server GWS with a unit price to calculate the communication fee, and issues a bill to the IP (step S204).

On the other hand, if the billing type is fixed-rate, then the billing managing
5 portion P-MAX of the gateway server GWS sends the URL of the IP server W to the billing system BILL at the same time as the electronic mail is received from the IP server, so as to order billing to that IP (step S205). The billing system BILL receives this and issues a bill of a standard amount to the indicated IP (step S206).

If the fixed-rate billing format is one where billing is applied to a standard
10 period of time such as by monthly units, the IP is billed whether or not the electronic mail from the IP server W reaches the gateway server GWS. Therefore, in this case, there is no cooperation between the gateway server GWS and the billing system BILL, and the billing system BILL independently issues a bill to the IP at regular periods.

15 C: Modification Examples

As previously mentioned, the present invention is not restricted to the above-described embodiments. The present invention can have various modifications within the range of the technical concept of the present invention, for example the following.

(1) In the embodiments, information is provided to mobile stations MS belonging
20 to a mobile packet communication network MPN from another network such as the Internet INET (first communication network), but if for example there exists another global network which can replace the Internet INET, then the present invention is applicable to cases wherein information is provided from such a network to a mobile station MS belonging to a mobile packet communication network MPN. In this case,

09500473-030500

the information resource of the IP server W can be specified by means of an absolute address defined in the global network to which it is applied, instead of by a URL.

Additionally, the network (second communication network) to which the user terminal belongs is not restricted to being a mobile packet communication network

- 5 MPN, and the invention is applicable for providing information to user terminals belonging to local networks such as fixed network which includes stationary terminals.

Furthermore, the present invention is not restricted to packet switching networks, and is applicable to data communication networks which perform other types of data communications, and the communication protocols indicated in the

- 10 embodiments represent only one possible example. Additionally, the form of the data transmitted from the IP server is not restricted to HTML format, and other formats may be employed. For example, if the transmitted information is only text data, then it is of course not necessary to employ a data format such as HTML which can handle multimedia.

- 15 (2) In the embodiments, the communication fee billing for pull-type information transmission was uniformly made amount-dependent, but the present invention is not limited thereto, so that it is possible to register information indicating whether amount-dependent or fixed-rate in the subscriber database UDB as in the case of push-type information transmission, and to perform billing procedures in accordance with the type
- 20 of billing. In the case that a fixed-rate system is employed for pull-type information transmission, the user or IP is billed a standard amount regardless of the number of exchanged packets, as in the case of push-type information transmission.

Additionally, while the billing type was set for each IP in the IP registration file of the subscriber database UDB in the embodiments, the present invention is not

restricted thereto, and it is possible to set for each user in the subscriber registration file. Additionally, when wishing to set the billing type according to the IP and the user, then the billing type for each user can be set for each IP in the IP registration information file, or the billing type for each IP can be set for each user in the subscriber registration

5 information file.

(3) While only communication fee billing was explained in the embodiments for the purpose of retaining simplicity, the present invention can be similarly applied to information fee billing. However, when employing amount-dependent information fee billing, billing does not depend on the number of exchanged packets as in

10 communication fee billing, but it is possible to apply various billing types such as for example, billing in accordance with the number of exchanged electronic mails or when wishing to change the amount depending on the case, appending amount information concerning a mail transmission to the electronic mail sent from the IP server W to send to the gateway server GWS.

15 Additionally, in the case of information fee billing, it is possible to perform only user billing and to not perform IP billing. In this case, all of the billing types in the IP registration information file in the subscriber database UDB can be set to user billing or the billing procedure can be not performed with respect to IP's which are set for IP billing.

20 (4) In the embodiments, the billing type in pull-type information transmission was decided by the gateway server GWS having a list table of IP-billing and referencing the table, but the present invention is not restricted thereto, and it is possible for example to append information indicating whether IP billing or not by adding a tag to the HTML data sent from the IP server W, and to have the gateway server GWS decide the billing

03500473-030000

type based on this information.

(5) The structure of the network in the embodiments is no more than one possible example, and the present invention is not restricted to such a structure. For example, it is possible to divide up the functions among a plurality of nodes such as by arranging
5 into divisions of nodes having a communication protocol converting function and nodes having other functions.

(6) In the embodiments, the IP server W manages user registration information with respect to the IP's in a first type of service by means of push-type information transmission, but the present invention may be such that the gateway server GWS
10 handles the management of user registration information. For example, as shown in Fig. 10, among the dialog screens displayed when a user performs registration procedures with the IP, it is possible to send and display only a dialog screen (hereafter referred to as a registration screen) for aiding in the registration operation as HTML data prepared by the gateway server GWS to the mobile station MS of the user, then
15 store and manage the user registration information at the gateway server GWS based on the user registration procedures. In this case, it is possible for the gateway server GWS to find which IP server W the user has performed registration procedures, based on the address information such as the URL designated when the user accesses the IP server W. Therefore, if the gateway server GWS has HTML data for providing a
20 registration screen with respect to a plurality of IP servers W in correspondence to the address information such as the URL, then it is possible to specify the HTML data to be sent to the mobile station MS of the user as a registration screen based on the address information such as the URL designated by the user.

(7) While in the embodiments, in the case of push-type information transmission,

05506473.030500

the user of a mobile station MS who has received a call for electronic mail operates the mobile station MS to access the gateway server GWS and download the electronic mail, but the present invention is not restricted thereto, and it is possible to make the process such that when the mobile station MS receives a call, it automatically accesses the

- 5 gateway server GWS and downloads the electronic mail without waiting for the instruction operations of the user.

(8) In the embodiments, IP billing is always used for push-type information transmission, but the present invention is not restricted thereto, and user billing can also be applied in the case of push-type information transmission. In this case, as with the

10 pull-type information transmission described above, an IP billing list table should be made based on the set contents of a subscriber database UDB, this table should be referenced in order to determine whether to use IP billing or user billing, and in the case of user billing, the procedures appropriate for user billing should be followed.

- Additionally, even in the case of exclusively IP billing, it is possible to prepare
- 15 an IP billing list table for having a list of relevant IP servers to be IP-billed, so that when there is a request for push-type information transmission from an IP server not listed in this table, the information transmission will not be routed such as by disposing of the sent electronic mail.

CLAIMS

1. A billing method in a communication network including an information provider server device, a plurality of user terminals which receive information from said
5 server device and a transfer device for routing information transmission between said server device and said user terminals; wherein said transfer device comprises:
- a step of recording billing management information for identifying server devices which are to be subject to IP billing which is billing with respect to information providers;
- 10 a step of detecting a network address of said server device designated when said user terminal receives an information transmission from said server device;
- a step of determining whether or not said server device is to be subject to IP billing based on the detected network address and said billing management information; and
- 15 a step of performing a billing procedure with respect to the information provider which performed the information transmission if said server device is determined to be subject to IP billing.
2. A billing method as recited in claim 1, wherein said transfer device does not
20 route an information transmission if it is determined not to be subject to IP billing.
3. A billing method as in claim 1, wherein said transfer device performs a billing procedure with respect to users who have received the information transmission if it is determined not to be subject to IP billing.

4. A billing method in a communication network including an information provider server device, a plurality of user terminals which receive information from said server device and a transfer device for routing information transmission between said server device and said user terminals; wherein said server device comprises:

a step of including billing information which indicates whether or not to use IP billing which is billing with respect to the information provider in the transmission data supplied to said user terminals in response to a request; and

said transfer device comprises:

a step of determining whether or not said information transmission is subject to IP billing based on said billing information when routing the exchange of said transmission data; and

a step of performing a billing procedure with respect to the information provider which provided said information transmission if it is determined to be subject to IP billing.

5. A billing method as in claim 4, wherein said transfer device performs a billing procedure with respect to users who have received the information transmission if it is determined not to be subject to IP billing.

6. A billing method in a communication network including an information provider server device, a plurality of user terminals which receive information from said server device and a transfer device for routing information transmission between said server device and said user terminals; wherein said transfer device comprises:

a mailbox for mediating push-type information transmission that is subject to IP billing which is billing with respect to the information provider;

and comprises:

a step of storing in said mailbox information mail sent from said server device

5 designating a desired destination and the address of said mailbox;

a step of transmitting the information mail stored in said mailbox to user terminals which are the designated destinations; and

a step of performing a billing procedure with respect to the information provider which offered said information transmission with respect to push-type

10 transmission services through said mailbox.

7. A billing method in a communication network including an information provider server device, a plurality of user terminals which receive information from said server device and a transfer device for routing information transmission between said

15 server device and said user terminals; wherein said transfer device comprises:

an IP-billed mailbox for mediating push-type information transmission that is subject to IP billing which is billing with respect to the information provider; and

a user-billed mailbox for mediating information transmission that is not subject to IP billing;

20 and performs a billing procedure with respect to the information provider which offered said information transmission with respect to push-type information transmission services through said IP-billed mailbox; and

a step of performing a billing procedure with respect to the user that received said information transmission with respect to information transmission services through

said user-billed mailbox.

8. A billing method as in any one of claims 1-7, wherein the object of said billing is a communication fee with respect to communication services for the information

5 transmission.

9. A billing method as in any one of claims 1-7, wherein the object of said billing is an information fee with respect to information provided by the information transmission.

10

10. A billing method as in claim 9, wherein said transfer device performs a billing procedure of information fees with respect to users if it is determined as not being subject to IP-billing, and otherwise does not perform a billing procedure of information fees.

15

11. A billing method as in any one of claims 1-7, characterized in that said server device belongs to a first communication network following a first communication protocol and said plurality of user terminals belong to a second communication network following a second communication protocol different from that of said first

20 communication network; and

said transfer device is a gateway for converting between said first and second communication protocols and routing information transmissions.

12. A billing method as in claim 11, wherein said second communication network

is a local network accommodating specific user terminals; and

said first information communication network is a global network interconnecting information resources such as said server device assigned identification information for identifying an absolute network address.

5

13. A billing method as in claim 12, wherein said second communication network is a mobile communication network accommodating a plurality of user terminals which are mobile terminals, and


said first information communication network is the Internet.

050873-030000
000000-07480560

When an IP (Information Provider) server is accessed from a mobile station, a gateway server determines whether or not the IP server is to be IP billed (S101). If it is not to be IP billed, then user billing is applied. In this case, the gateway server sends a user management number of the mobile station and the number of exchanged packets to a billing system (S102). The billing system calculates a communication fee in accordance with the number of packets, and issues a bill to the user specified by the user management number (S103). On the other hand, if the accessed IP server is to be IP billed, then IP billing is applied. In this case, the gateway server sends the number of exchanged packets and the address of the accessed IP server to the billing system (S104). The billing system calculates a communication fee in accordance with the number of packets, and issues a bill to the IP (S105).

1/9

FIG. 1

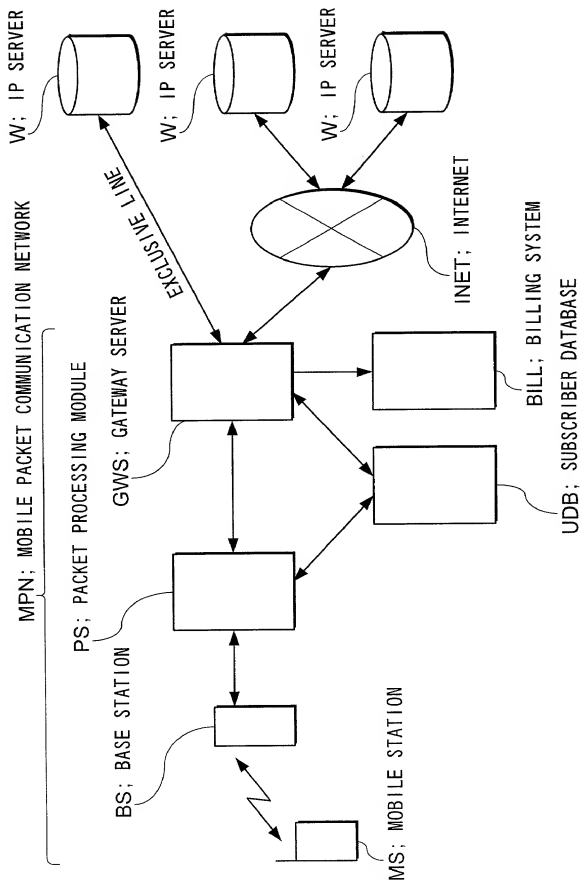

2/9

FIG. 2

SUBSCRIBER REGISTRATION INFORMATION FILE

TELEPHONE NUMBER	NAME	SEX	BIRTHDATE	ADDRESS
.....
.....
.....
.....
.....
.....
.....


IP REGISTRATION INFORMATION FILE

COMPANY NAME	URL	IP BILLING/USER BILLING	AMOUNT-DEPENDENT/FIXED-RATE
.....
.....
.....
.....
.....

FIG. 3 is a block diagram of a system architecture. A dashed box encloses the main system components. Inside the dashed box, a central horizontal BUS connects five main components: an IP SERVER (labeled W-MAX), a SYSTEM CONTROL PORTION (labeled I-MAX), a USER INFORMATION MANAGING PORTION (labeled U-MAX), a BILLING MANAGING PORTION (labeled P-MAX), and an ELECTRONIC MAIL MANAGING PORTION (labeled M-MAX). Bidirectional arrows connect each of these components to the BUS. The SYSTEM CONTROL PORTION (I-MAX) has two external connections: one to a MOBILE PACKET COMMUNICATION NETWORK and another to an OTHER NETWORK. The USER INFORMATION MANAGING PORTION (U-MAX) is connected to a SUBSCRIBER DATABASE (labeled UDB, represented as a cylinder). The BILLING MANAGING PORTION (P-MAX) is connected to a BILLING SYSTEM (labeled BILL, represented as a rectangle). The IP SERVER (W-MAX) is connected to a GWS (GATEWAY SERVER) located outside the dashed box.


4/9

FIG. 4

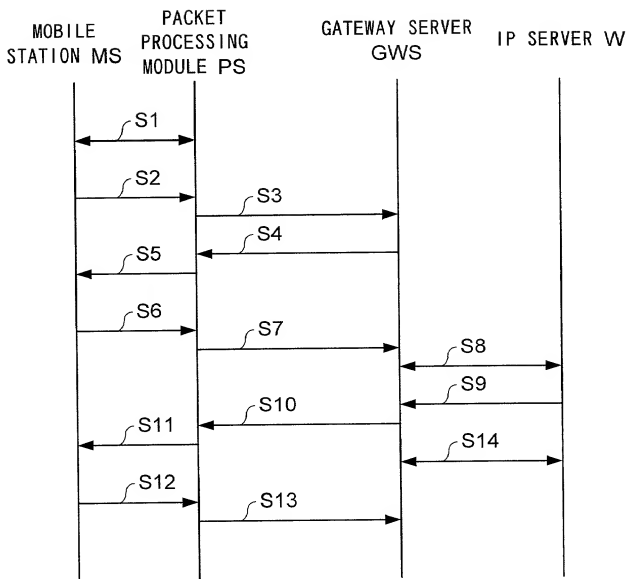

5/9

FIG. 5

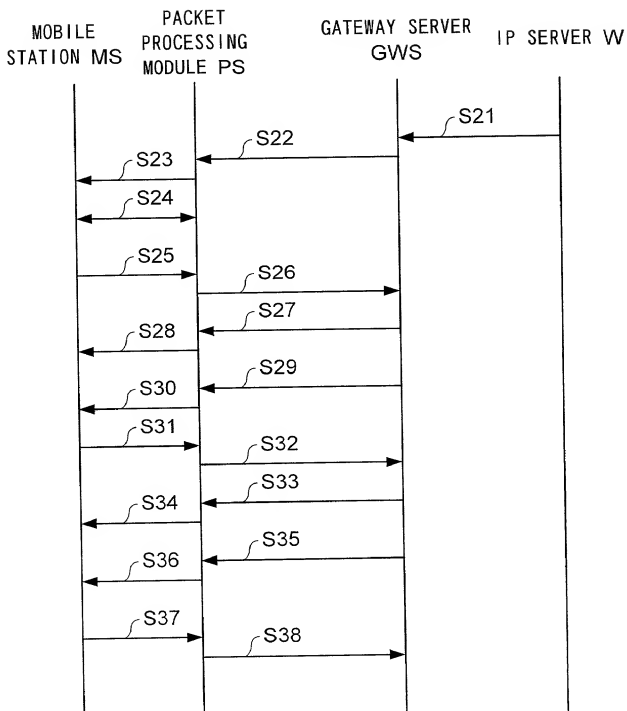

09/508473-030000

6/9

FIG. 6



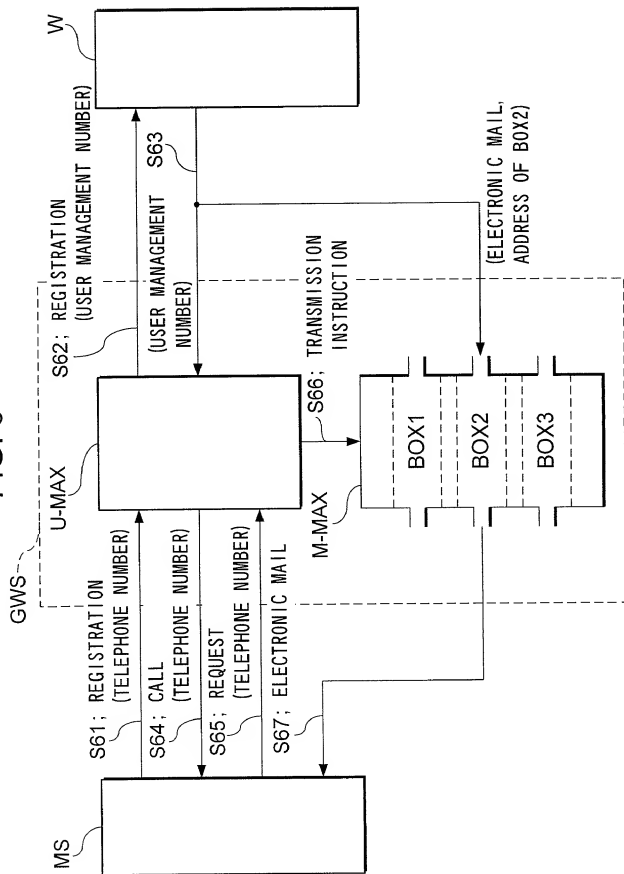


FIG. 7

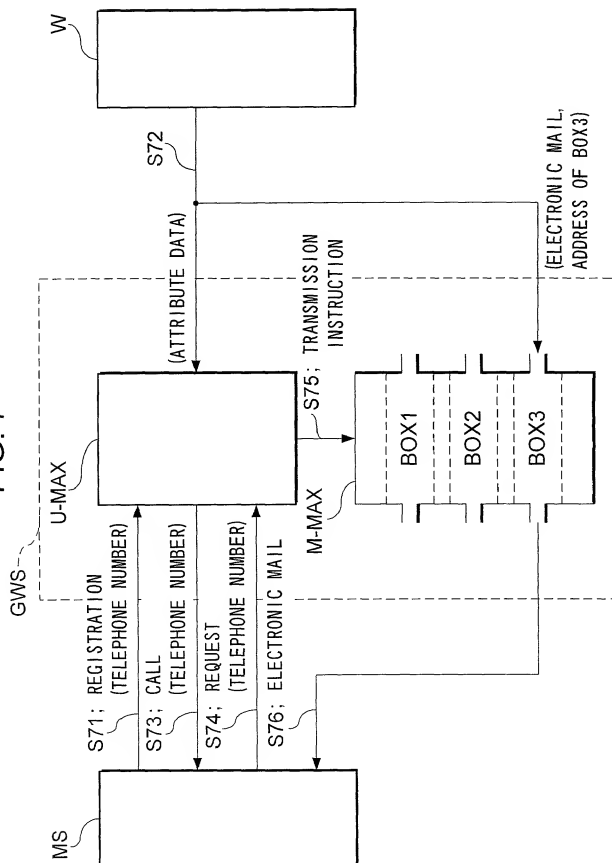

8/9

FIG. 8

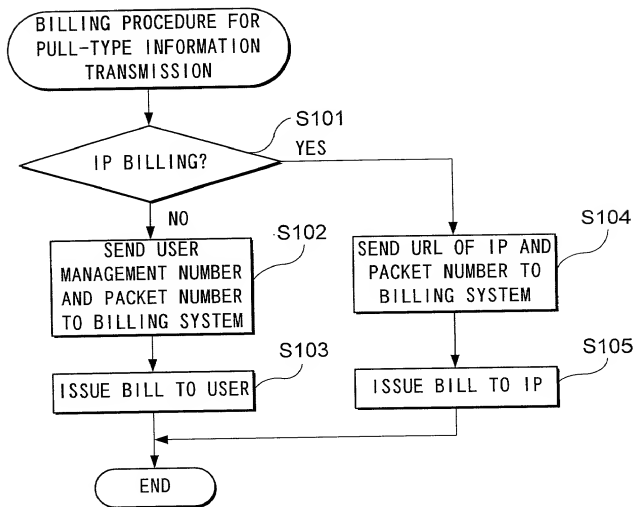

9/9

FIG. 9


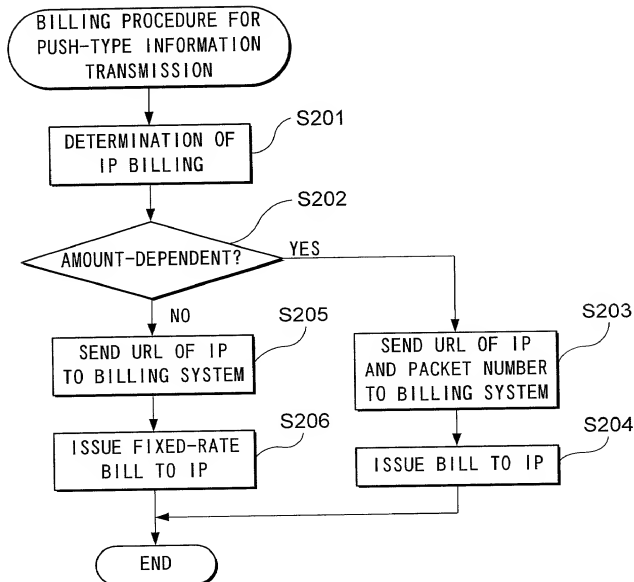


FIG. 10

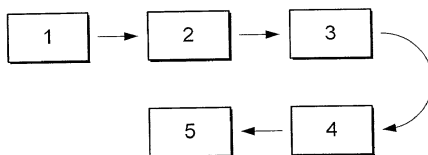

1~5; SEQUENCE OF DIALOG SCREENS DISPLAYED WHEN USER PERFORMS REGISTRATION PROCEDURES

4; REGISTRATION SCREEN PROVIDED BY GATEWAY SERVER

DECLARATION FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled BILLING METHOD FOR COMMUNICATION NETWORK the specification of which:

- ☐ is attached hereto.
- ☒ was filed on August 27, 1999 as International Application No. PCT/IP99/04637.
- ☐ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability as defined in Title 37, Code of Federal Regulations, § 1.56(a).

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

<u>Hei 10-242319</u>	<u>Japan</u>	<u>27/08/1998</u>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	Yes	No

I hereby claim the benefit under 35 U.S.C. § 119(c) of any United States provisional application(s) listed below:

_____ (Application Serial No.)	_____ (Filing Date)
-----------------------------------	------------------------

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

<u>PCT/IP99/04637</u>	<u>August 27, 1999</u>	<u>Pending</u>
(Application Serial No.)	(Filing Date)	(Status-patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Inventor's Signature
Full name of sole or first inventor
Residence
Citizenship
Post Office Address

1-00 Masaaki Yamamoto Date: 27. January, 2000
Masaaki Yamamoto
Kanagawa, Japan 52X
Japanese
9-2-10-107, Sugita, Isogo-ku, Yokohama-shi, Kanagawa 235-0033 Japan

Inventor(s): Masaaki Yamamoto et al.
Title: BILLING METHOD FOR COMMUNICATION NETWORK

POWER OF ATTORNEY

The specification of the above-identified patent application:

☐ is attached hereto
☒ was filed on August 27, 1999 as international application No. PCT/IP99/04637

I hereby revoke all previously granted powers of attorney in the above-identified patent application and appoint the following attorneys to prosecute said patent application and to transact all business in the Patent and Trademark Office connected therewith:

(3) Gustavo Siller, Jr. - 32,305
Tadashi D. Horie - 40,437
Daniel B. Burg - 41,649

Please address all correspondence and telephone calls to Tadashi Horie in care of:

Brinks Hofer Gilson & Lione
P.O. Box 10395
Chicago, IL 60610
(312)321-4200

The undersigned hereby authorizes the U.S. attorneys named herein to accept and follow instructions from _____ as to any action to be taken in the Patent and Trademark Office regarding this application without direct communication between the U.S. attorney and the undersigned. In the event of a change in the persons from whom instructions may be taken, the U.S. attorneys named herein will be so notified by the undersigned.

NTT Mobile Communications Network Inc., a Japanese Corporation, certifies that it is the assignee of the entire right, title and interest in the patent application identified above by virtue of either:

☒ An assignment from the inventor(s) of the patent application identified above, a copy of which is attached hereto.
OR

☐ An assignment from the inventor(s) of the patent application identified above. The assignment was recorded in the Patent and Trademark Office at Reel _____, frame _____.
OR

☐ A chain of title from the inventor(s), of the patent application identified above, to the current assignee as shown below:

1. From _____ To: _____
The document was recorded in the Patent and Trademark Office at Reel _____, frame _____, or a copy thereof is attached.
2. From _____ To: _____
The document was recorded in the Patent and Trademark Office at Reel _____, frame _____, or a copy thereof is attached.

☐ Additional documents in the chain of title are listed on a supplemental sheet.

The undersigned has reviewed the assignment or all the documents in the chain of title of the patent application identified above and, to the best of undersigned's knowledge and belief, title is in the assignee identified above.

The undersigned (whose title is supplied below) is empowered to act on behalf of the assignee.

I hereby declare that all statements made herein of my own knowledge are true, and that all statements made on information and belief are believed to be true; and further, that these statements are made with the knowledge that willful false statements, and the like so made, are punishable by fine or imprisonment, or both, under Section 1001, Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Signature: 水田 耕太 Date: 1/2/2000
Name: Kota Kinoshita
Title: Senior Vice President,
Deputy Senior Executive Manager,
Research and Development Plan Department

Inventor's Signature
Full name of second inventor
Residence
Citizenship
Post Office Address

2 Shinji Kobayashi Date: 26/01/2000
Shinji Kobayashi
Kanagawa, Japan SPX
Japanese
B-103, NTT Tomioka Dai-2 Dokushin-ryo, 9-2-11, Sugita, Isogo-ku,
Yokohama-shi, Kanagawa 235-0033 Japan

Inventor's Signature
Full name of third inventor
Residence
Citizenship
Post Office Address

3 Kenichi Yakawa Date: 28/01/2000
Kenichi Yakawa
Kanagawa, Japan SPX
Japanese
B-206, Maison Bonuru, 2768 Shinohara-cho, Kouhoku-ku, Yokohama-shi,
Kanagawa 222-0026 Japan

Inventor's Signature
Full name of fourth inventor
Residence
Citizenship
Post Office Address

4 Kenichi Yamaguchi Date: 21/01/2000
Kenichi Yamaguchi
Aichi, Japan SPX
Japanese
#3410, NTT Yagoto-ryo, 411, Shiogamaguchi 1-chome, Tenpaku-ku, Nagoya-shi,
Aichi 468-0073 Japan

BRINKS HOFER GILSON & LIONE
P.O. Box 10395
Chicago, IL 60610
(312) 321-4200